

SUPAPLEAT HFC

High Surface Area Pleated Cartridge



SupaPleat HFC high surface area cartridges utilise pleated depth media offering maximum efficiency and exceptionally high flow capabilities. Developed to suit industrial processes where high performance is required, the low pressure loss and high dirt capacity makes it the ideal choice for fine polishing applications. In-house developments have optimised the pleat pack ensuring rigidity is maintained at all flow rates.

Two media options are offered as standard, the PP and GP. The PP features the specific CRY cryptosporidium grade designed for Food and Beverage applications. The standard range is manufactured using all polypropylene end caps and internal support core. Amazon Filters also offers cartridges manufactured with stainless steel cage and core and nylon end fittings. These are particularly suited for applications where higher temperature ratings are required or compatibility may be an issue. Thermal welding processes seal all components, eliminating adhesives and extractables and optimising cartridge integrity.

SupaPleat HFC-PP cartridges feature:

- Melt blown polypropylene media
- Extended life versions available

- Wide chemical compatibility
- Materials meet US FDA title 21 requirements
- Meets the requirements for food contact as detailed in European Regulation (EC) Number 1935/2004

SupaPleat HFC-GP cartridges feature:

- Glass microfibre media
- Extremely high dirt holding capacity

Absolute Rated Filter Media

- Available from 0.5 to 90µm
- Consistent reliable performance
- Beta 5000 Rating

Product Features

SupaPleat HFC filter cartridges are produced using an improved manufacturing process resulting in the following features:

- High surface area, resulting in low clean Δp and excellent dirt holding capacity
- 100% thermally welded construction for maximum integrity and strength, up to 1541mm (60")
- Internal support core for resistance to back pressure
- More robust stainless steel cage and core option available
- Nylon end caps option available



Amazon Filters manufacture a comprehensive range of filter housings for the SupaPleat HFC cartridges. Available in many materials and sizes to suit all flow rates, please consult our sales office for further details on our full range.

Features and Benefits

- Absolute removal ratings for consistent and reliable performance
- Filters can be sterilised by steam or sanitised by hot water or chemicals
- PP – Wide chemical compatibility using materials that meet FDA requirements
- XP - Extended life version for more challenging applications
- GP – Glass microfibre media gives excellent dirt holding capacity
- Stainless steel cage and core and nylon end caps versions available for more aggressive processes
- Low maintenance – fewer number of cartridges
- Cryptosporidium grade (CRY) with typical 10^4 log reduction value for use in Food and Beverage applications

See product guides for further details of test methods and rated efficiencies

Industries and Applications

Food and Beverage

Pharmaceutical

Fine Chemicals

Water Treatment

Automotive

Oil & Gas

Power Generation

- Bottled water, Beers, Wines, Polishing lines, General clarification
- Solvent discharge, Raw water supplies, batch transfers
- Polymers, Acids, Bases, Solvents
- Pre reverse osmosis, UV protection, Resin trap
- Wash solutions, Cooling fluid, Blanking wash oils, Electrophoretic paints
- Water injection systems, Amine streams, Glycols
- Water treatment (boiler feed sweetening), return condensate lines

AMAZON

SupaPleat HFC Technical Data

Dimensions

Outside Diameter:	160mm	
Core Diameter:	75mm	
Typical Surface Area:	15PP:	8 -10.3m ²
(per 40")	15GP:	6.2 - 6.7m ²
	15XP:	4.9m ²

Sterilisation and Sanitisation

Steam or Autoclave:	121°C (10 cycles)
Hot Water:	90°C for 30 mins

Maximum Operating Conditions

Temperature:	15PP: 80°C
	15PS / PN: 100°C

Normal operating mode is inside to outside flow direction

Recommended change-out differential pressure: 2.5 Bar*¹



Maximum ΔP	PP Media	GP Media
@ 20°C	3.4	3.4

*¹ Amazon Filters recommend that SupaPleat HFC cartridges are changed at a differential pressure of 2.5 bar in normal service - the operating conditions above should be treated as maximum differential pressures for short term use without causing cartridge collapse problems.

Materials of Construction

Filter Media:	PP-Polypropylene GP-Borosilicate Glass Fibre with epoxy resin binder
Cage, Core & End Caps:	P - All Polypropylene S - Polypropylene Endcaps and 304 St.St core and cage N - Nylon Endcaps and 304 St.St core and cage

Product validation guide available on request. All SupaPleat HFC cartridges are manufactured under strict control with batch number identification, giving full traceability on all components.

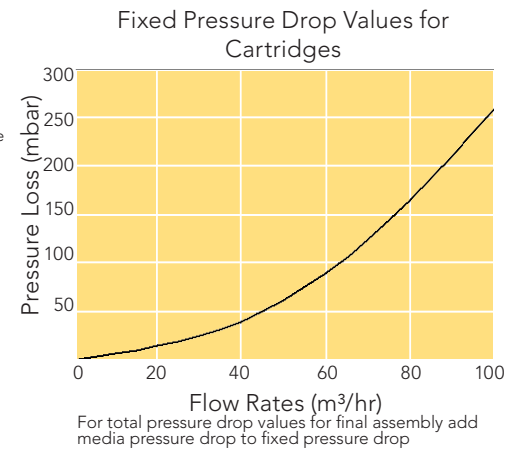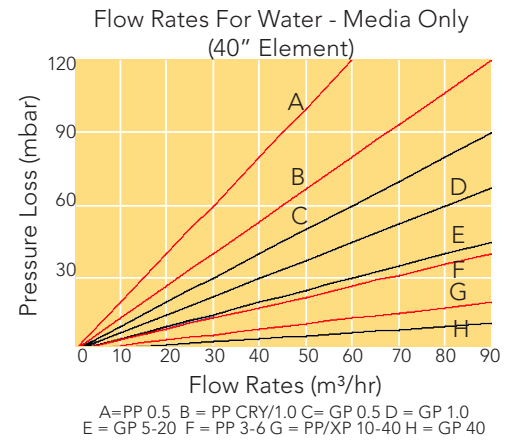

AMAZON FILTERS LTD.

ALBANY PARK ESTATE, FRIMLEY ROAD
CAMBERLEY, SURREY, GU16 7PG
ENGLAND

Tel. +44 (0) 1276 670600
Fax. +44 (0) 1276 670101
Email. sales@amazonfilters.co.uk
Web. www.amazonfilters.com