



# RAM PUMPS

Meeting The Toughest Challenges



## 675 SERIES

Quintuplex Plunger Pump

Design, Development and Manufacture of Reciprocating Process Pumps  
to Recognised International Industry Standards

### **RAM Triplex Plunger**

**Pumps** are designed and manufactured to the highest degree of precision to ensure total reliability and durability is maintained throughout our product range.


**RAM Pumps** conforms to all the latest quality standards and directives including ISO 9001/2008, ATEX, EC P.E.D., Norsok, Gost, Stoomwezen. These standards are necessary when supplying this type of product for the most arduous and demanding of applications.

## **Features / Benefits**

- Crankcase design with special built-in motor support mounting.  
*Providing the option of installing the motor overhead to keep both the footprint and weight to a minimum.*
- A range of liquid end materials are available.  
*Providing complete compatibility with pumping media.*
- Special pressure-formed, braided, PTFE impregnated Kevlar® packings.  
*Offering exceptionally long life and a wide range of liquid compatibility.*
- Packings housed in packing cylinder.  
*Assuring proper alignment and optimum life.*
- Plungers are specially surface treated for abrasion resistance. Solid ceramic plungers are also available.  
*Providing the highest quality sealing surface for extended packing life.*

## **675 SERIES**

Quintuplex Plunger Pump

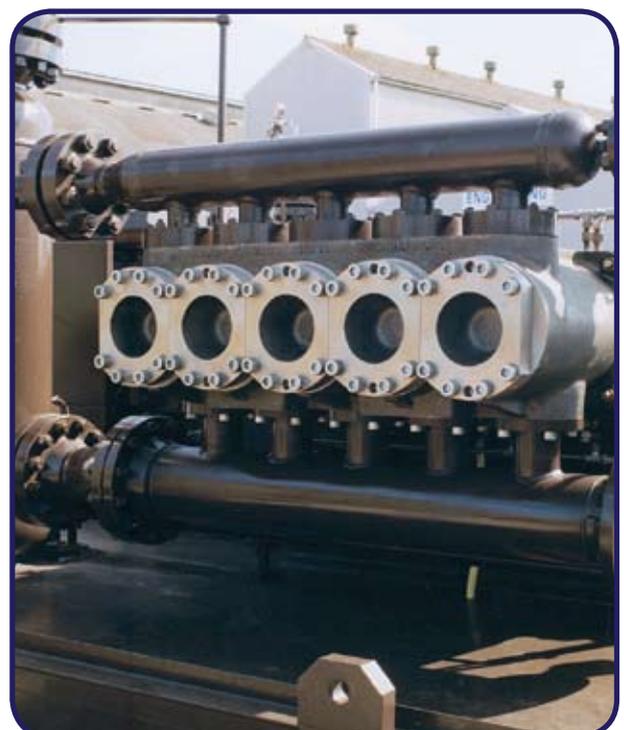


- Spheroidal graphite iron crankcase.  
*Offering exceptional strength, vibration dampening and flame and spark resistance for added protection in hazardous areas.*
- Various plunger diameters available.  
*Allowing for a wide range of performances to best suit the application.*
- Standard splash crankcase lubrication with optional pressure lubrication system.
- Modular design.
- Bespoke builds available to suit individual clients specification.

## Specification HCH

STANDARD	
Flow (l/min)	2400
Max System Press (barg)	250
Max RPM	360
API	
Flow (l/min)	1610
Max System Press (barg)	250
Max RPM	240
COMMON SPECIFICATION	
Max Inlet Pressure (barg)	30
Minimum RPM	100
Max kW	550
Stroke (mm)	180
Max Temp (°C)	150*
Min Temp (°C)	-6*
Inlet Ports (2)	8"
Discharged Ports (2)	4"
Weight (kg)	4500
Crankcase Oil Capacity (litres)	160

\* Based upon standard materials. Alternative metallurgy/elastomer combinations are available in order to meet your specific needs for lower sub zero operation to increased positive temperatures.

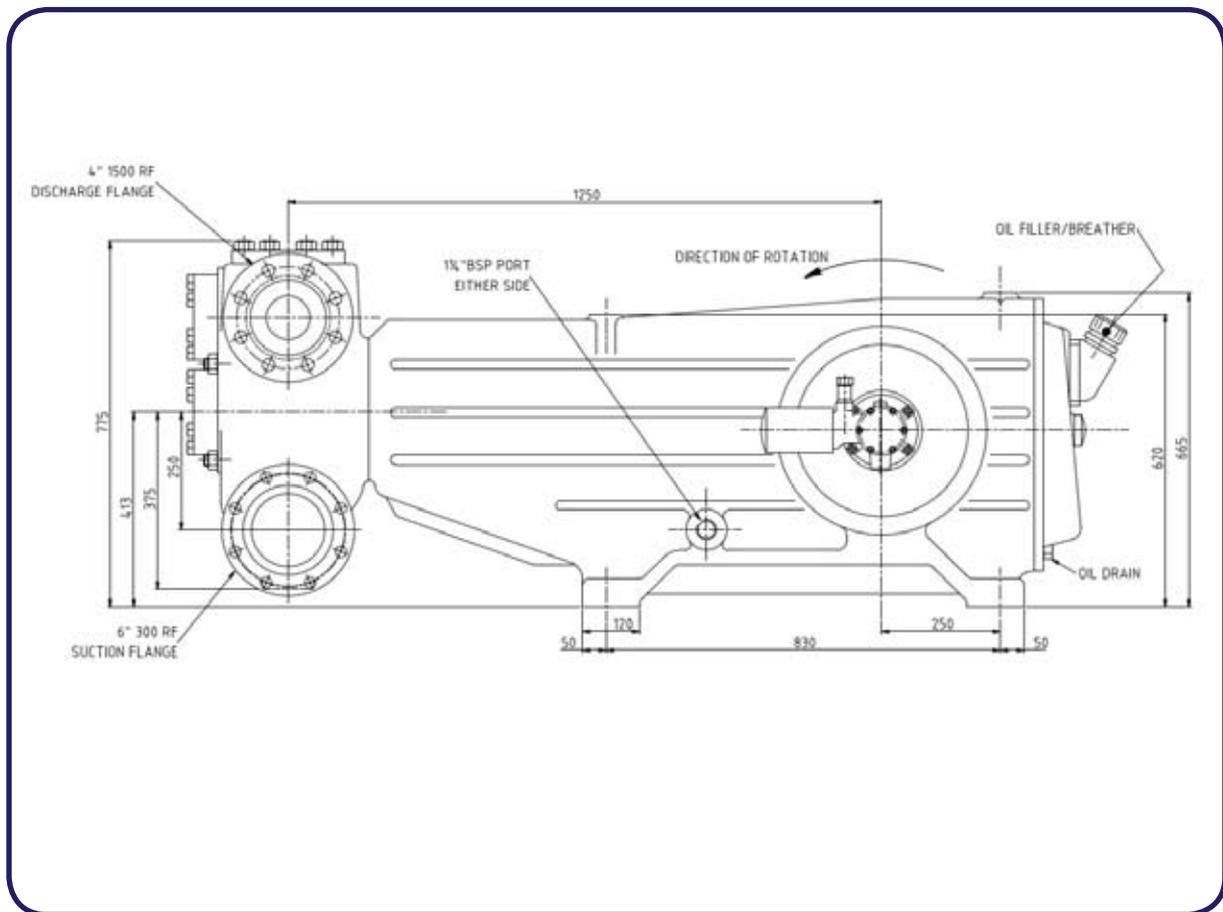

**RAM PUMPS**  
Meeting The Toughest Challenges



With over 40 years of experience in the field, Ram Pump's product range covers almost any application. Given that there is almost an infinite variation of build options, we pride ourselves in our expertise to construct special purpose equipment for our client's individual needs.

### **Oil and Gas**

- Glycol Injection or Regeneration
- Methanol Injection
- Hydrocarbon Condensate
- Hydro Test
- Water Production
- Drill Cutting Re-injection
- Miscible Gas Injection
- Fracking
- Liquid Condensate Injection

### **Reverse Osmosis**

- De-salination
- Food Processing
- Pharmaceuticals

### **Industrial**

- Water Jetting
- De-scaling
- Boiler Feed

Ram Pumps Limited  
Unit C, Decoy Road, Dominion Way,  
Worthing, West Sussex, BN14 8ND  
**Tel:** +44 (0) 1903 206 622  
**Fax:** +44 (0) 1903 205 511  
[www.rampumps.co.uk](http://www.rampumps.co.uk)  
[sales@rampumps.co.uk](mailto:sales@rampumps.co.uk)

Your Authorised Representative:



**RAM PUMPS**  
Meeting The Toughest Challenges