


# SUPAPLEAT FFC


## Large Diameter High Flow Filters



SupaPleat FFC filters are high surface area cartridges offering maximum efficiency and exceptionally high flow capabilities.

Developed to suit large scale processes where high performance is required, the filters incorporate advanced pleated depth media providing low pressure loss and high dirt capacity. This makes SupaPleat FFC cartridges the ideal choice for a wide range of applications.

These large diameter pleated cartridges are manufactured from either polypropylene or borosilicate glass microfibre depth media. The standard range is manufactured using polypropylene end caps and internal

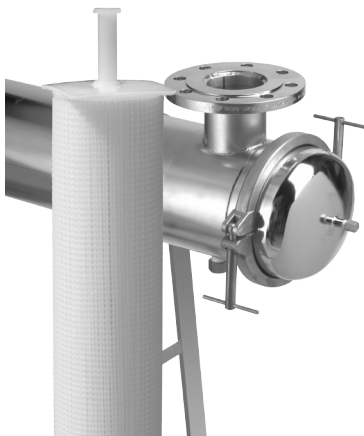

support core. Amazon Filters also offers cartridges manufactured with stainless steel cage and core and nylon end fittings. These are particularly suited for applications where higher temperature ratings are required or compatibility may be an issue. Thermal welding processes seal all components, eliminating adhesives and extractables and optimising cartridge integrity. In-house developments have optimised the pleat pack ensuring rigidity is maintained at all flow rates.

### Product features

- High surface area polypropylene or glass fibre media operating in 'out to in' mode
- More robust stainless steel cage and core option available
- Nylon end caps option available
- Available with different connectors to allow retrofitting of existing high flow systems
- Special CRY Cryptosporidium grade designed for Food and Beverage applications
- All cartridges are thermally bonded and adhesive free
- Meets requirements on materials used for articles intended to come into contact with food as described in CFR Title 21, as well as the


appropriate European guidelines

- Manufactured under strict control with batch number identification, giving full traceability on all components
- Extended life versions available

### Filter Housings

Amazon Filters manufactures a range of stainless steel and plastic housings for SupaPleat FFC cartridges including the 27 Series GRP Glass Reinforced Plastic housings with super duplex end fittings. This housing is particularly suited to brackish or seawater applications.

Please consult our Sales Office for further details on these ranges.

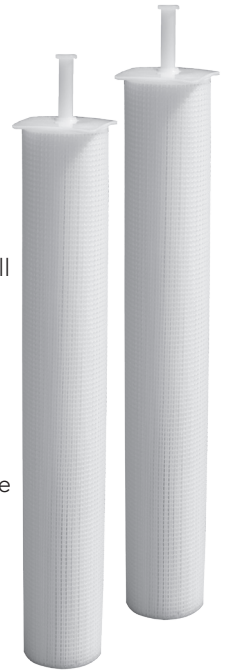

## Features and Benefits

- High flow rates and long life to minimise filtration costs
- Up to 60" length filters allow quick cartridge replacement
- Absolute removal ratings (Beta 5000) for consistent and reliable performance
- Available in numerous removal ratings (0.5 - 50µm) so suitable for a wide range of applications
- Cryptosporidium removal grade (CRY) with typical 10<sup>4</sup> log reduction value
- Extended life version for more challenging applications
- Stainless steel cage and core and nylon end caps versions available for more aggressive processes

## Industries and Applications

- |                          |   |
|--------------------------|---|
| <b>Food and Beverage</b> | • Bottled water, Beers, Wines, Polishing lines, General clarification       |
| <b>Pharmaceutical</b>    | • Solvent discharge, Raw water supplies, batch transfers                    |
| <b>Fine Chemicals</b>    | • Polymers, Acids, Bases, Solvents  |
| <b>Water Treatment</b>   | • Pre reverse osmosis, UV protection, Resin and carbon trap                 |
| <b>Automotive</b>        | • Wash solutions, Cooling fluid, Blanking wash oils, Electrophoretic paints |
| <b>Oil &amp; Gas</b>     | • Water injection systems, Amine streams, Glycols                           |
| <b>Power Generation</b>  | • Water treatment (boiler feed sweetening), return condensate lines         |



# SupaPleat FFC Technical Data

## Dimensions

Outside Diameter: 153mm  
 Typical Surface Area: 5.2 - 10.7 m<sup>2</sup> per 40" filter

## Maximum Operating Conditions

Temperature: 24PP: 80°C  
 24PS / PN: 100°C

Recommended Maximum Differential Pressure:

Forward Flow: 4.0 Bar @ 20°C



Recommended change-out differential pressure: 2.5 Bar

## Materials of Construction

Filter Media: P-Polypropylene  
 G-Borosilicate Glass Fibre with epoxy resin binder  
 Cage, Core & End Caps: P - All Polypropylene  
 S - Polypropylene Endcaps and 304 St.St core and cage  
 N - Nylon Endcaps and 304 St.St core and cage

Product validation guide available on request. All SupaPleat FFC cartridges are manufactured under strict control with batch number identification, giving full traceability on all components.

Flow Rates For Water - Media Only  
 (40" Element)

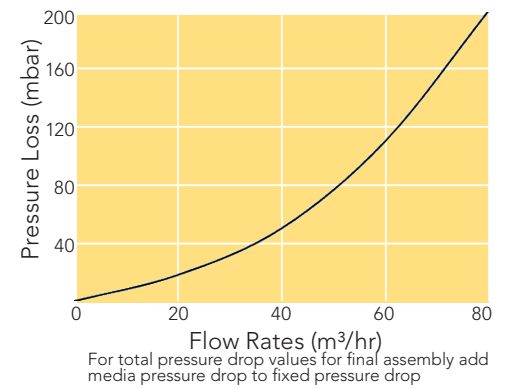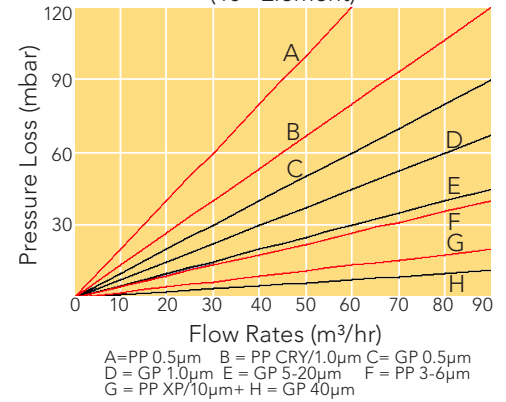

## AMAZON FILTERS LTD.

ALBANY PARK ESTATE, FRIMLEY ROAD  
 CAMBERLEY, SURREY, GU16 7PG  
 ENGLAND

**Tel.** +44 (0) 1276 670600  
**Fax.** +44 (0) 1276 670101  
**Email.** sales@amazonfilters.co.uk  
**Web.** www.amazonfilters.com