

59 SERIES

High Pressure Filter Assembly



The Amazon **59 Series** single stack, high pressure cartridge filter assembly is ideal for use with PVC, sealants and waxes that are used in the Automotive and other industries. These high viscosity products (c.70,000 – 100,000 cP) are used to seal joints on car bodies against water ingress. Due to the physical characteristics of these high viscosity liquids, conventional filtration would not be suitable because of the high operating pressures required to apply these products.

The **59 Series** filter assembly offers a cost effective and practical filtration solution for many high pressure, high viscosity sealant applications. It is available in Carbon Steel and has maximum operating parameters of 350 bar at 110°C with a flow capacity of up to 20 lt/min. They contain 10" long Stainless Steel

high strength filter elements which have been proven to be the best way to prevent any particulate contamination from reaching the car body.

It is unique in its design with an extra thick, high strength cylindrical support core with an easy to clean filter mesh. It is available in a range of filter ratings from 200 to 1200µm - thus providing optimum flexibility for filtering a range of high viscosity products. The filter elements can be easily cleaned ready for re-use, either by jet washing or solvent cleaning.



Features and Benefits

- Can be operated at very high pressure, up to 350 bar
- Designed for filtration of high viscosity fluids e.g.70,000 – 100,000 cP
- Ideal for sealants, mastics and waxes
- Can be supplied with filter elements with removal ratings of 200µm to 1200µm
- Filter elements can be cleaned and reused

Product Range

Amazon Filters design and manufacture an extensive range of liquid filtration systems, providing one of the widest selections of filtration vessels, depth filters and pleated cartridges available today, ensuring excellent process and filter compatibility. As one of Europe's leading manufacturers of filtration systems, Amazon Filters is able to offer a solution to meet all filtration requirements. Amazons' filters are manufactured in clean room conditions and all products come with detailed Product Validation Guides and Technical Support documentation.



AMAZON

59 Series Technical Data

Maximum Operating Conditions

Body Casing:	Carbon Steel
Element:	316 Stainless Steel
Seal:	Ethylene Propylene
Weight:	57kg


Operating Conditions

Maximum pressure:	350 Barg
Maximum temperature:	110°C
Volume:	1.5 Lt

Connections

Inlet/Outlet:	1½" BSPF
Vent:	½" BSF with plug
Drain:	½" BSPF with plug

Technical drawings for each individual housing showing dimensions, volume, weights, maximum temperatures and design pressures available on request.

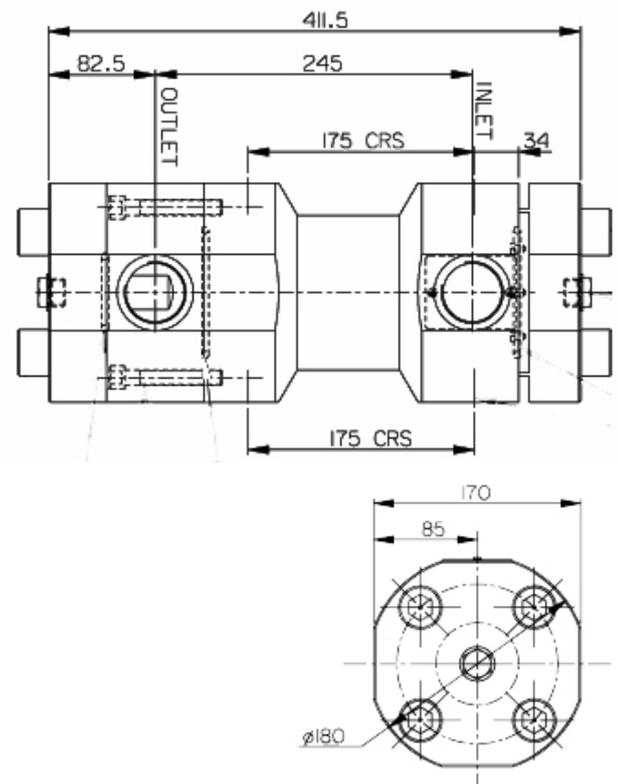

AMAZON FILTERS LTD.

ALBANY PARK ESTATE, FRIMLEY ROAD
CAMBERLEY, SURREY, GU16 7PG
ENGLAND

Tel. +44 (0) 1276 670600

Fax. +44 (0) 1276 670101

Email. sales@amazonfilters.co.uk

Web. www.amazonfilters.com

Distributed by: